

With enhanced strength and stability for higher crane loads, numerous configuration possibilities, and a body rating of 52,000 ft-lb (7.9 tm), the Dominator I mechanics truck offers exceptional performance in virtually any industry. Pair it with the new 30 percent lighter IMT 6000 series crane and you've got the ultimate lightweight service truck package. The Dominator I also comes with payload increasing options such as a lightweight compact workbench bumper and a redesigned lightweight modular customizable bolt bin offering.

# > BASE BODY SPECIFICATIONS

Body Size	9' (2.7 m)	9' (2.7 m)	11' (3.4 m)	11' (3.4 m)	11' (3.4 m)	11' (3.4 m)	11' (3.4 m)	11' (3.4 m)
Body Configuration <sup>1</sup>	LH&RHSTD	RFRSD	LH&RHSTD	RFRSD	LFRSD	LF&RFSTD	LHAR,RFRSD	ALLRSD
Body Rating	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)
Body Weight <sup>2,3</sup>	2728 lb (1237.4 kg)	2806 lb (1272.8 kg)	3103 lb (1407.5 kg)	3212 lb (1456.9 kg)	3212 lb (1456.9 kg)	3317 lb (1504.6 kg)	3495 lb (1585.3 kg)	3495 lb (1585.3 kg)
Body Width	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)
GVWR	14,000-19,500	14,000-19,500	16,000-19,500	16,000-19,500	16,000-19,500	16,000-19,500	16,000-19,500	16,000-19,500
Storage Capacity <sup>3</sup>	97.2 ft <sup>3</sup> (2.8 m <sup>3</sup> )	104.2 ft <sup>3</sup> (2.9 m <sup>3</sup> )	120.5 ft <sup>3</sup> (3.4 m <sup>3</sup> )	131.3 ft <sup>3</sup> (3.7 m <sup>3</sup> )	131.3 ft <sup>3</sup> (3.7 m <sup>3</sup> )	142.2 ft <sup>3</sup> (4.0 m <sup>3</sup> )	142.2 ft <sup>3</sup> (4.0 m <sup>3</sup> )	166.1 ft <sup>3</sup> (4.7 m <sup>3</sup> )
Angle of Departure	15°	15°	15°	15°	15°	15°	15°	15°
Chassis CA <sup>4</sup>	60" (1.5 m)	60" (1.5 m)	84" (2.1 m)	84" (2.1 m)	84" (2.1m)	84" (2.1m)	84" (2.1m)	84" (2.1 m)
Max. IMT Crane Model	8600 22'	8600 22'	8600 22'	8600 22'	8600 22'	8600 22'	8600 22'	8600 22'

<sup>&</sup>lt;sup>1</sup> Standard (STD) = 44", Raised (RSD) = 60". <sup>2</sup> Includes doors, side packs, workbench. <sup>3</sup> Body weight and storage capacity are estimated based on standard product configuration.

<sup>&</sup>lt;sup>4</sup> Does not include welder deck.



# > STANDARD FEATURES

- IMT CMD.CTRL™
- IMT Patented Inverted A-Frame Design
- · Compete System Integration Including Body, Crane, and Compressor
- · Three-Point Access
- · Automotive-style Electrical Harnessing
- IMT Compartment Coating (VOC-compliant Polyurethane Modified Multicolor Spray Finish)
- · Workbench Bumper with Through Compartment

## > OPTIONS

- · Lightweight Compact Workbench Bumper without through Compartment
- High-Intensity LED Lighting Package
- · Axalta Bedliner
- · Drawer Sets, Adjustable Shelves
- 3" (7.6 cm) Divided Adjustable Shelves
- · Lightweight, Adjustable Bolt Bins
- Rear Stabilizers Manual or Hydraulic
- · Front Stabilizers Manual
- · Workbench Vises and Vise Plates
- · Compartment Pressurization System
- · Compressed Air and Welding Systems
- · Headache Rack
- · Telescopic Roof
- · Master Lock System

# > COMPATIBLE IMT CRANES

### ELECTRIC

- 6006i 3203i
- 5005i 2020E
- 4004i 1015E

- 8600
  6000 • 2020
- 7500
  - 2820 • 1015


### COMPLETE REMOTE CONTROL

Control your chassis, crane functions, service body components and air compressor remotely. IMT CMD.CTRL<sup>™</sup> combines strong, reliable hardware with flexible, intuitive software to give operators a productive, user-friendly experience.



### LIGHTWEIGHT MODULAR BOLT BINS

New bolt bins can be configured in numerous ways to meet your field service needs.

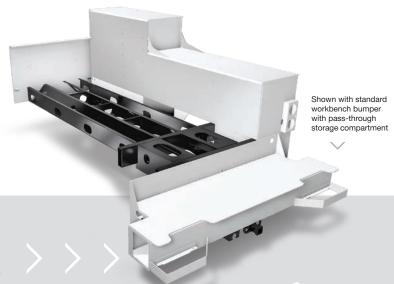

# BODY SUBSTRUCTURE

Patented A-Frame design with integrated crane box is engineered for maximum strength and weight reduction.



An Oshkosh Corporation company

Iowa Mold Tooling Co., Inc. | 500 Highway 18 West | Garner, Iowa 50438 | 800-247-5958 | imt.com









